



official website



SHENZHEN XINSPower TECHNOLOGY CO., LTD.
XINSPower GROUP LIMITED

Add
The 2nd-4th Floor, The 2nd Building, Xin Hao Sheng Da Yang Technology Park, Fu Rui Road No.11, Qiao Tou Community, Fu Hai Street, Bao An District, Shenzhen, China

Tel
+86-755-2321-2520

Mail
gm@xinpower.com

Fax
+86-755-2350-0926

Website
www.xinpowertech.com
www.xinpower.com

XinSPower

PROFESSIONAL CHARGER
MANUFACTURER SINCE 2008



GaN Charger | PD Charger | Power Strip | Car Charger | PowerBank | Wireless Charger

CHARGER CATALOG

Company Profile

Established in 2008, Xinspower has over 12000sqm of modern-ized production base and more than 500 skilled workers, including 50 experienced manage and technical personnel.

Advanced manufacturing equipment and whole-process quality control ensures monthly capacity reach 1 million pieces of products. These products are certified by UL/CUL/FCC/CE/CB /SAA/C-tick/RCM/PSE/KC/GSetc. OEM and ODM projects are also welcomed.

Xinspower is devoted to provide their clients best products and excellent service through control all procedure from raw material purchasing, production, inspection, packaging to final shipment.



15⁺
Years of R & D and Production Experience

500
Employees with 50 DedicatedR&D Engineers

12,000
SQM.Manufactory Space

10,00,000
PCS Production Capacity

ISO9001/ISO14001
Quality Management System Certificate Obtained



Certification



UL FCC GS CE SAA



CB PSE KC ETL UKCA

Company Honor





High and new tech enterprises Invention patent Design patent Utility model patents



The world's first PD3.1140 Whnon-apple UL certification holder BSCI ISO 9001:2015
ISO 14001:2015 Copyright

Quality Control

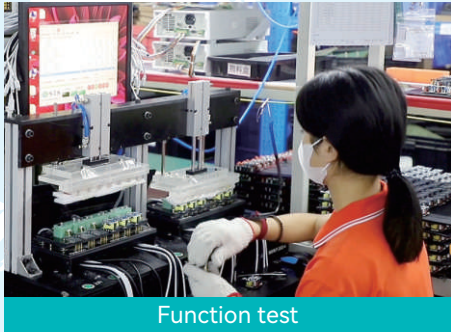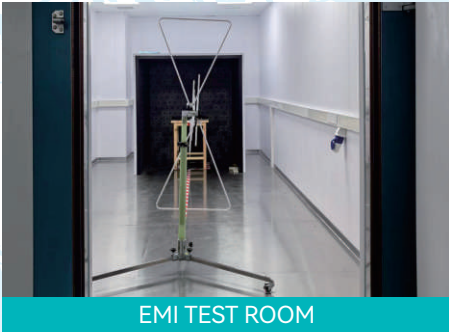

Main Customer



Safety and Comfortable Charging Series

安心充电系列



Ga N



PN207X

20W | 1USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz 0.5A
USB-C Output: 5V 3A, 9V 2.22A, 12V 1.67A PPS 3.3-11V 2A (20W Max)
Color: White, Black or OEM
Size: 32x30x29mm(Foldable US plug)
Certification: UL, FCC, CB, CE, PSE, CCC
AC Plug (X): US, JP, CN

Ga N



PQ207X

20W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz 0.5A
USB-C Output: 5V 3A, 9V 2.22A, 12V 1.67A(20W Max) 3.3-11V 2A (PPS)
USB-A Output: 5V 3A, 9V 2A, 12V 1.5A(18W Max)
USB-C+USB-A Output: 5V 3.1A(15.5W Max)
Color: White, Black or OEM
Size: 31x31x32mm
Certification: CE, CB, ETL, PSE, CCC
AC Plug (X): US, JP, CN

Ga N



PN307X

30W | 1USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz 0.9A
USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)
3.3-5.9V 3A, 3.3-11V 3A(PPS)
Color: White, Black or OEM
Size: 31x31x32 mm
Certification: UL, FCC, CB, PSE, CCC
AC Plug (X): US, JP, CN

Classic Series

经典系列



Ga N



PN352X

GaN | 35W | 1USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max) 3.3-11V 3A(PPS)
Color: White, Black or OEM
Size: 40.5x40x28mm
Certification: UL, FCC, CB, CE, PSE, KC, CCC
AC Plug (X): US, JP, CN, EU, KC, AU, UK



Ga N



PQ352X

GaN | 35W | 1USB-C+1USB-A | PD3.0 | QC3.0|Wall Charger

Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max) 3.3-11V 3A(PPS)
USB-A Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A (30W Max)
USB-C+USB-A Output: 5V 4A (20W Max)
Color: White, Black or OEM
Size: 40.5x40x28mm
Certification: UL, FCC, CB, CE, PSE, KC, CCC
AC Plug (X): US, JP, CN, EU, KC, AU, UK



Ga N



PT352X

GaN | 35W | 2USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz
Color: White, Black or OEM
Size: 40.5x40x28mm
Certification: UL, FCC, CB, CE, PSE, KC, CCC
C1, C2 Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max) 3.3-11V 3A (PPS)
C1+C2 Output: 5V 4A (20W Max)
AC Plug (X): US, JP, CN, EU, KC, AU, UK



Ga N



PT352SX

GaN | 35W | 2USB-C | PD3.0|Wall Charger

Input: AC100-240V, 50/60Hz
Color: White, Black or OEM
Size: 40.5x40x28mm
Certification: UL, FCC, CB, CE, PSE, KC, CCC
C1, C2 Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35.04W Max) 3.3-11V 3A (PPS)
C1+C2 Output: With Dynamic Allocation
C1+C2=20W Max+15W Max=35W Max, C1+C2=15W Max+20W Max=35W Max
C1+C2=25W Max+10W Max=35W Max, C1+C2=10W Max+25W Max=35W Max
C1+C2=18W Max+17W Max=35W Max, C1+C2=17W Max+18W Max=35W Max
AC Plug (X): US, JP, CN, EU, KC, AU, UK, Interchangeable Plug



GaN



PN452X

45W | 1USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 2.25A(45W Max) 3.3-11V 4.05A(PPS)

Color: White, Black or OEM

Size: 45.5x40x28 mm

Certification: UL, FCC, CE, CB, KC, PSE, UKCA, SAA+RCM+C-tick, CCC

AC Plug (X): US, EU, UK, JP, AU, KC, CN



GaN



PT452X

GaN | 45W | 2USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 2.25A(45W Max) 5-11V 4A(PPS)

C1+C2=20W Max+25W Max.

C1 20W Output: 5V 3A, 9V 2.2A, 12V 1.67A./C2 25W Output: 5V 3A, 9V 2.77A, 12V 2.08A.

Color: White, Black or OEM

Size: 45.5x40x28 mm

Certification: UL, FCC, CE, CB, PSE, KC, CCC

AC Plug (X): US, EU, UK, JP, CN



GaN



PN651X

GaN | 65W | 1USB-C | PD3.0 | Wall Charger

Input: AC100-240V,50/60Hz

USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A(65W Max) 3.3-11V 4.05A(PPS)

Color: White, Black or OEM

Size: 50x40x28mm

Certification: UL, FCC, CB, CE, PSE, KC, CCC

AC Plug (X): US, EU, UK, JP, CN



GaN



PT652X

GaN | 67W | 2USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1, C2 Output: 5V 3A, 9V 3A, 12V 3A,15V 3A, 20V 3.35A(67Wmax)

C1+C2 Output: With Dynamic Allocation

C1+C2=45W+20W Max, C1+C2=20W+45W Max

C1+C2=35W+30W Max, C1+C2=30W+35W Max

Color: White, Black or OEM

Size: 50x50x29mm

Certification: UL,FCC, CB, CE, PSE, KC, CCC



GaN



PQ652X

GaN | 67W | 2USB-C+1USB-A | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

USB-A Output: 4.5V 5A, 5V 4.5A, 9V 3A, 12V 1.5A(30W Max)

C1, C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.35A(67W Max)

C1+C2 Output: With Dynamic Allocation

C1+C2=45W+20W Max, C1+C2=20W+45W Max

C1+C2=35W+30W Max, C1+C2=30W+35W Max

Color: White, Black or OEM

Size: 50x50x29mm

Certification: UL, FCC, CE, CB, PSE, KC, CCC

AC Plug (X): US, EU, UK, JP, AU, KC, CN



GaN



PQ657X

GaN | 65W | 3USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1, C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A 20V 3.25A(65W Max) 3.3-11V 5A(PPS)

C3 Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)3.3-11V 3A, 3.3-11V 2A(PPS)

USB-A Output: 4.5V 5A, 5V 4.5A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)

C1+C2 Output: 45W+20W(65W Max), C1+C3 output: 45W+20W(65W Max)

C2+C3 Output: 45W+20W(65W Max), C1+USB-A output: 45W+18W(63W Max)

C2+USB-A Output: 45W+18W(63W Max), C3+USB-A output: 5V 3A(15W Max)

C1+C2+C3 Output: 20W+20W+20W(60W Max)

C1+C2+USB-A Output: 20W+20W+18W(58W Max)

C1+C2+(C3+USB-A) Output: 20W+20W+15W(55W Max)

Color: White,Black or OEM

Size: 50x50x29mm

Certification: UL, FCC, CB, CE, PSE, KC, CCC



GaN



PQ1004L

GaN | 100W | 3USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1 Output: 5V 3A 9V, 3A 12V, 3A 15V, 3A 20V 5A(100W Max)

C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max) 3.3-11V 4.05A (PPS)

C3 Output: 5V 3A, 9V 2.22A, 12V 1.5A(20W Max)

USB-A Output: 4.5V 5A, 5V 4.5A , 9V 2A, 12V 1.5A(22.5W Max)

C1+C2 Output: 60W+30W(90W Max), C1+C3 Output: 60W+20W(80W Max)

C1+A Output: 60W+22.5W(82.5W Max), C2+C3 Output: 45W+20W(65W Max)

C2+USB A Output: 45W+22.5W(67.5W Max), C3+USB A Output: 5V 4A(20W Max)

C1+C2+C3 Output: 45W+30W+20W(95W Max)

C1+C2+USB A Output: 45W+30W+22.5W(97.5W Max)

C1+(C3+USB A) Output: 60W+20W(80W Max)

C2+(C3+USB A) Output: 45W+20W(65W Max)

C1+C2+(C3+USB A) Output: 45W+30W+20W(95W Max)

Color: White, Black or OEM

Size: 75x60x29mm

Certification: FCC, ETL, CB, CE, UKCA, PSE, SAA, RCM, CCC

AC Plug (X): US, EU, UK, JP, AU, KC, CN, Interchangeable Plug





PQ1401X GaN | 140W | 2USB-C+1USB-A | PD3.1 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz
 C1 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A, 28V 5A(140W Max) 3.3-21V 5A (PPS)
 C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max) 3.3-21V 5A(PPS)
 USB A Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
 C1+C2 Output: 100W+20W (120W Max), C1+USB A Output: 100W+18W(118W Max)
 C2+USB A Output: 5V 4A(20W Max)
 C1+(C2+USB A)Output: 100W+20W(5V 4A)(120W Max)
 Color: White, Black or OEM Size: 73.2x73x29mm
 Certification: UL,FCC, CB, CE, PSE, KC, UKCA, SAA+RCM+C-tick,CCC
 AC Plug (X): US, EU, UK, JP, AU, KC, CN, Interchangeable Plug



PT1401X GaN | 140W | 2USB-C | PD3.1 | Wall Charger

Input: AC100-240V,50/60Hz
 C1, C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A, 28V 5A(140W Max) 3.3-21V 5A(PPS)
 C1+C2 Output: 100W+20W(120W Max)
 Color: White, Black or OEM Size: 73.2x73x29mm
 Certification: UL, FCC, CB, CE, PSE, KC, UKCA, SAA+RCM+C-tick,CCC
 AC Plug (X): US, EU, UK, JP, AU, KC, CN, Interchangeable Plug



PQ1401LX GaN | 140W | 2USB-C+1USB-A | PD3.1 | QC3.0 | Wall Charger

Input: AC100-240V,50/60Hz
 C1 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A, 28V 5A(140W Max) 3.3-21V 5A (PPS)
 C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max)3.3-21V 5A(PPS)
 USB A Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
 C1+C2 Output: 100W+20W (120W Max) C1+USB A Output: 100W+18W(118W Max)
 C2+USB A Output: 5V 4A(20W Max)
 C1+(C2+USB A) Output: 100W+20W(5V 4A)(120W Max)
 Color: White, Black or OEM Size: 73.2x73x29mm
 Certification: UL, FCC, CB, CE, PSE, KC, UKCA, SAA+RCM+C-tick, CCC
 AC Plug (X): US, EU, UK, JP, AU, KC, CN, Interchangeable Plug



Super Slim Series

超薄系列



GaN



PT358

GaN | 35W | 2USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1, C2 Output: 5V 3A, 9V 3A, 12V 2.92A, 15V 2.33A, 20V 1.75A(35.04W Max) 3.3-11V 3A(PPS)

C1+C2 Output: With Dynamic Allocation;

C1+C2=20W Max+15W Max=35W Max;

C1+C2=15W Max+20W Max=35W Max;

C1+C2=25W Max+10W Max=35W Max;

C1+C2=10W Max+25W Max=35W Max;

C1+C2=18W Max+17W Max=35W Max;

C1+C2=17W Max+18W Max=35W Max

Certification: UL,FCC, CB,PSE,CCC

Size: 73x43.5x13mm

GaN



PT658

GaN | 65W | 2USB-C | PD3.0 | Wall Charger

Input: AC100-240V,50/60Hz

C1/C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A, 3.3V-11V 5A(PPS)

C1+C2 Output: With Dynamic Allocation

C1+C2=45W Max+20W Max

C1+C2=20W Max+45W Max

C1+C2=30W Max+30W Max

Certification: UL, FCC, CB,PSE,CCC

Size: 82x46x13mm

lipstick Series

口红系列





PN351

GaN | 35W | 1USB-C | PD3.0 | Wall Charger

Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max) 3.3-11V 3A(PPS)
Color: White, Black or OEM Size: 43x32x31mm
Certification: UL, FCC, CB, CE, PSE, KC, CCC AC Plug (X): US, EU, UK, JP, AU, KC, CN



PQ351

GaN | 35W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max) 3.3-11V 3A(PPS)
USB-A Output: 5V 3A, 9V 2A, 12V 1.5A(18W Max)
USB-C+USB-A Output: 5V 3.1A(15.5W Max) Color: White, Black or OEM
Size: 48.5x32x31mm Certification: UL, FCC, CB, CE, PSE, KC, CCC
AC Plug (X): US, EU, UK, JP, AU, KC, CN



PT654

GaN | 65W | 2USB-C | PD3.0 | Wall Charger

Input: AC100-240V50/60Hz
C1, C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A(65W Max) 3.3-11V 5A (PPS)
C1+C2 Output: With Dynamic Allocation
C1+C2=45W Max+20W Max C1+C2=20W Max+45W Max C1+C2=30W Max+30W Max
Color: White, Black or OEM Size: 32x30x64mm
Certification: UL, FCC, CB, CE, PSE, KC, CCC AC Plug (X): US, EU, UK, JP, AU, KC, CN



PQ655Pro/PQ655L

GaN | 65W | 2USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V,50/60Hz
C1, C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A(65W Max) 3.3-11V 5A (PPS)
USB-A Output: 4.5V 5A, 5V 4.5A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
C1+C2 Output: 45W +18W (63W Max) C1+USB-A Output: 45W +18W (63W Max)
C2+USB-A Output: 5V 3A(15W Max)
C1+C2+USB-A output: C145W+(C2+USB-A)5V 3A(60W Max)
Color: White, Black or OEM Size: 66x41x29mm
Certification: UL, FCC, CB, CE, PSE, KC, CCC AC Plug (X): US, EU, UK, JP, AU, KC, CN



PQ1005

GaN | 100W | 2USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz
C1, C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max) 3.3-20V 5A (PPS)
USB A Output: 5V 3A, 9V 3A, 12V 2.5A(30W Max) C1+C2 Output=65W+30W (95W Max)
C1+USB A Output=65W+30W(95W Max) C2+USB A Output=10W+10W(20W Max)
C1+C2+USB A Output=65W+10W+10W(85W Max) Color: White, Black or OEM
Size: 83.5x42.5x33mm Certification: UL, FCC, CB, CE, PSE, KC, CCC
AC Plug (X): US, EU, UK, JP, AU, KC, CN

Retractable Type-C
cable Series

自带伸缩线系列



GaN



PT3515X

35W(2C) Retractable cable charger

GaN | 35W | 2USB-C | PD3.0 | Wall Charger with built-in retractable cable

Input: AC100-240V, 50/60Hz

C1,C2 Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max)

PPS: 5-11V 3A (33W Max)

C1+C2=20W+15W Max

C1 20W Output: 5V 3A, 9V 2.2A, 12V 1.5A. / C2 15W Output: 5V 3A, 9V 1.67A, 12V 1.25A.

C1 is the 0.7M length retractable cable, C2 is the fixed type-C port.

Color: White, Black or OEM

Size: 62x47x34mm

Certification: UL, FCC, CB, PSE, CCC

AC Plug (X): US, JP, CN

GaN



PT6515X

65W(2C) Retractable cable charger

GaN | 65W | 2USB-C | PD3.0 | Wall Charger with built-in retractable cable

Input: AC100-240V, 50/60Hz 1.5A

C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A, PPS: 5-11V 5A (65W Max)

C1+C2=45W+20W Max

C1 45W Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 2.25A

or PPS: 5-11V 4.05A. / C2 20W Output: 5V 3A, 9V 2A, 12V 1.5A.

C1 is the 0.7M length retractable cable, C2 is the fixed type-C port.

Color: White, Black or OEM

Size: 64x52.5x35mm

Certification: UL, FCC, CB, PSE, CCC

AC Plug (X): US, JP, CN

Desktop Series

桌面式系列



200W



PQ1005D

GaN |100W | 2USB-C+1USB-A | PD3.0 | QC3.0 | Home Charger

Input: AC100-240V,50/60Hz
 C1, C2 output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max) 3.3-20V 5A (PPS)
 USB A output: 5V 3A, 9V 3A,12V 2.5A(30W Max)
 C1+C2 output=65W+30W (95W Max)
 C1+USB A output=65W+30W(95W Max)
 C2+USB A output=10W+10W(20W Max)
 C1+C2+USB A output=65W+10W+10W(85W Max)
 Color: White, Black or OEM
 Size: 86.8x42.5x33mm
 Certification: UL, FCC, CB, CE, PSE, KC, CCC



PQ1006D

GaN |100W | 4USB-C+2USB-A+1Wireless | PD3.0 | QC3.0 | Home Charger

Input: AC100-240V, 50/60Hz
 C1, C2 output: 5V 3A, 9V 3A, 12V 3A,15V 3A, 20V 5A(100W Max) 3.3-21V 5A (PPS)
 C3, C4 Output: 5V 3A 9V 3A 12V 2.5A 15V 2A, 20V 1.5A(30W Max) 3.3-11V 2.75A(PPS)
 A1, A2 Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
 Wireless Output: 15W Max
 Color: Grey, Black or OEM
 Size: 120x85x28mm
 Certification: UL, FCC, CB, CE, PSE, KC, CCC



PQ3001DI

PD 300W 4C1A GaN Charger

Input: 100-240Vac, 50/60Hz.3.8A Max
 USB-C1/C2 Output: 3.3-21V15A or 5V/3A 9V/3A 12V/3A 15V/3A 20V15A 28V15A (140Wmax)
 USB-C3 Output: 3.3-21V/5A or 5V/3A 9V/3A 12V/3A 15V/3A 20V15A (100Wmax)
 USB-C4 Output: 3.3-11V/5A or 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A (65Wmax)
 USB-A Output: 4.5V15A 5V14.5A 5V/3A 9V/3A 12V/3A 20V/3A (60W)
 USB-C1+USB-C2+USB-C3+USB-C4+USB- A=140W+65W+65W+12W+12W (294Wmax)
 Size: 108x78x32mm
 Certification: UL, FCC, CE, CB, PSE, KC, SAA, RCM, CCC



PQ2001D

GaN | 200W | 4USB-C+2USB-A | PD3.0 | Home Charger

Input: AC100-240V, 50/60Hz, 3.0A Max
 C1/C2/C3/C4 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max)
 A1/A2 Output: 4.5V 5A, 5V 4.5A, 9V 2A, 12V 1.5A(22.5W Max)
 C1+C2+C3+C4+(A1+A2) Output: 65W+45W+45W+20W+5V 4A
 Size: 100.7x100.6x32 mm
 Certification: UL, FCC, CE, CB, PSE, KC, SAA, RCM, CCC

Laptop Power Adapter Series

笔电适配器系列



A6514/P6514 SERIES

65W ADAPTER



A6514/ ADAPTER
Input100-240V, 50/60HZ
Output: 12V5Aor19V3.42Aor20V3.25A (65Wmax)
P6514/PD ADAPTER
Input100-240V, 50/60HZ
Output: 5V3A/9V3A/12V3A/15V3A/20V3.25A(65Wamx)
Size: 64x64x30 mm
Certification: UL, FCC, CE, CB, PSE, CCC
AC Plug (X): US, EU, UK, JP, AU, KC, CN, Interchangeable Plug

A6524/P6524/PN6524 SERIES

65W ADAPTER



A6524/ ADAPTER
Input100-240V,50/60HZ
Output: 12V5Aor19V3.42Aor20V3.25A (65Wmax)
P6524/PD ADAPTER
Input100-240V,50/60HZ
Output: 5V3A/9V3A/12V3A/15V3A/20V3.25A(65Wamx)
PN6524/USB-C CHARGER
Output: 5V3A/9V3A/12V3A/15V3A/20V3.25A(65Wamx)
PPS: 5-21V3A(63Wmax)
Size: 58x58x29 mm
Certification: UL, FCC, CE, CB, PSE, CCC
AC Plug (X): US, EU, UK, JP, AU, KC, CN, Interchangeable Plug

A1015/P1015/PN1015 SERIES

100W ADAPTER



A1015/ ADAPTER
Input100-240V, 50/60HZ
Output: 19V5.26Aor19.5V5, 12Aor 20V5A (100Wmax)
P1015/PD ADAPTER
Input100-240V, 50/60HZ
Output: 5V3A/9V3A/12V3A/15V3A/20V5A(100Wamx)
PN1015/USB-C CHARGER
Output: 5V3A/9V3A/12V3A/15V3A/20V5A(100Wamx)
PPS: 5-21V5A(100Wamx)
Size: 68x68x31 mm
Certification: UL, FCC, CE, CB, PSE, CCC, KC, KCC, SAA/RCM
AC Plug (X): US, EU, UK, JP, AU, KC, CN, Interchangeable Plug

E-Sports Series

电竞适配器系列



Ga N



A1209

Input: AC100-240V, 50/60Hz

Output: 19V/6.315A or 19.5V/6.15A or 20V/6A (120Wmax)

Color: White, Black or OEM

Size: 100x63x25mm

Certification: UL, FCC, CB, CE, PSE, KC, CCC, SAA, RCM, UKCA,

Ga N



A2409

Input: AC100-240V, 50/60Hz

Output: 19V/12.63A or 19.5V/12.3A or 20V/12A (240Wmax)

Color: White, Black or OEM

Size: 155x66.5x26mm

Certification: UL, FCC, CB, CE, PSE, KC, CCC, SAA, RCM, UKCA,

Ga N



A2809

Input: AC100-240V, 50/60Hz

Output: 19V/14.73A or 19.5V/14.35A or 20V/14A (280Wmax)

Color: White, Black or OEM

Size: 146.5x81.5x26mm

Certification: UL, FCC, CB, CE, PSE, KC, CCC, SAA, RCM, UKCA

Multi-in-one GaN power strip

多合一氮化镓排插



PA6512X/PA6513X

GaN | 67W | 3USB-C+3AC | PD3.0 | Home Charger
PA6512(Output 3C)
Input: 100-125V,50/60Hz, 1.5A
AC Output Total: AC100-125V,10A,1250W Max
C1/C2/C3 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,20V 3.35A(67W Max) PPS:3.3V-11V 5A
C1+(C2+C3) Output: 45W+5V4A
PA6513(Output 2C1A)
Input: 100-125V,50/60Hz, 1.5A
AC Output Total: AC100-125V,10A,1250W Max
C1/C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,20V 3.35A(67W Max) PPS:3.3V-11V 5A
USB-A Output: 5V3A/9V2A/12V1.5A C1+(C2+C3) Output: 45W+5V4A
Size: 62.5x62.5x48mm
Certification: PA6512P&PA6513P JP Standard PSE /PA6512U&PA6513U US Standard ETL,FCC



PA6515E/ PA6515K

GaN | 67W | 2USB-C+1USB-A | PD3.0 | Home Charger
PA6515E(EU Standard)/PA6515K(KR Standard)
3AC Output Total: 250V 16A, 4000W Max(When USB ports without load)
250V 15A, 3750W Max(When USB ports with load)
USB-C1/C2 Output: 5V 3A,9V 3A, 12V 3A,15V 3A,20V 3.35A(67W Max)3.3V-11V 5A(PPS)
USB-A Output: 5V3A,9V 2A, 12V 1.5A(18W Max)
USB-(C1+C2): 45W+20W or 35W+30W(65W Max) (Dynamic Allocation)
USB-C1+USB-A: 45W+18W(63W Max) USB-C2+USB-A: 5V 2A+5V 2A (20W Max)
USB-C1+(USB-C2+USB-A): 45W+(5V 2A+5V 2A)65W Max
(USB-C1): 45W(5V 3A, 9V 3A,12V 3A,15V 3A,20V 2.25A)
USB-C1/C2: 35W(5V 3A,9V 3A, 12V 2.92A,15V 2.33A,20V 1.75A)
USB-C1/C2: 30W(5V 3A,9V 3A,12V2.5A,15V 2A,20V1.5A)
USB-C1/C2: 20W(5V 3A, 9V 2.22A,12V 1.67A) Size: 76.2x76.2x80.4mm
Certification: PA6515E(EU Standard)CB,CE / PA6515K(KR Standard) KC,KCC




PA1301J GaN | 130W | 3USB-C+2USB-A+3AC | PD3.0 | QC3.0 | Home Charger

Input: AC125V, 50/60Hz, 15A Max
3AC Output Total(PA1301J): 14A, 1400W Max(When DC output ports without load)
3AC Output Total(PA1301U): 15A, 1875W Max(When DC output ports without load)
3AC Output Total: 13A,1300WMax(When AC+DC output ports 130W Max)
USB-A1/A2: 5V 3A,9V 3A, 12V 2.5A,20V 1.5A(30W Max)
C1/C2/C3: 5V 3A, 9V 3A, 12V 3A,15V 3A, 20V 5A(100W Max)
C1+C2: 65W+65W C2+C3: 65W+30W C1+C3/A1/A2:100W+30W
C1+C2+C3/A1/A2:65W+30W+20W C1+C2+C3+A1/A2: 45W+30W+20W+20W
C1+C2+C3+A1+A2: 45W+30W+20W+10W+10W
DC Output Total: 130W Size: 163x103x32mm
Certification: PA1301J JP Standard PSE / PA1301U US Standard ETL, FCC

Magnetic Power Bank Series

磁吸移动电源系列



BW3516

TYPE-C1 Input&Output:
5V=3A/9V=3A/12V=2.92A/15V=2.33A/20V=1.75A(MAX35W)
TYPE-C1+ TYPE-C2:
5V=3A/9V=3A/12V=2.92A/15V=2.33A/20V=1.75A
PPS: 3.3-11V=3A(MAX 33W)
USB-A: 4.5V=5A/5V=3A/9V=2.5A/12V=1.5A(MAX 22.5W)
USB-C1+C2=30W Max, USB-C1+A or C2+A=30W Max, USB-C1+C2+A=30W Max.
Battery capacity: 10000mAh LED Digital Display
Size:15.8 x 68.2 x 97.2mm



BW2010

USB-c Input: 5V3A/9V2.22 (20w Max)
USB-c Output: 5V3A/9V2.2A (20w Max)
Magnetic Wireless Charging: Qi2-15W/MagSafe
Battery capacity: 5000mAh
Size:103x69x9.8mm



BW3010

Battery capacity: 10000mAh 36Wh
Wireless Charging Output: 5W/10W/15W MPP Qi2.0
TYPE-C1 Input&Output: 5V/3A、9V/3A、10V/2.25A、12V/2.5A、15V/2A、20V/1.5A(30W Max)
TYPE- C1 + Wireless Charging Output: 5V4A(20W Max)
Built-in mobile phone stand
Size: 102.7x68.6x17.0mm



BW3010 PRO

(Built-in 1 cable)

Battery capacity: 10000mAh 36Wh
Wireless Charging Output: 5W/10W/15W MPP Qi2.0
TYPE-C1 Input&Output: 5V/3A、9V/3A、10V/2.25A、12V/2.5A、15V/2A、20V/1.5A (30W Max)
TYPE-C2 Output: 5V/3A、9V/3A、10V/2.25A、12V/2.5A、15V/2A、20V/1.5A (30W Max)
TYPE- C1 + C2 Output: 5V4A(20W Max)
Built-in mobile phone stand
Size: 102.7x68.6x17.8mm

Multi-in-One series

多合一系列



GaN



PB6521(2C)

2 in 1Power Bank Specification

- 1. AC Input :100-240V,50-60Hz
 - 2. AC-DC Output:
TypeC1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A(67W max)
PPS: 3.3-6V/5A or 3.3-11V/6A (66W max)
AC-DC Dual Port Output: Type C1+C2: 45W+20W / 30W+30W(max)
 - 3. Battery powered bidirectional input/output :
Type C1/C2: 5V/3A, 9V/2.22A, 12V/2.5A,15V/2.33A, 20V/1.75A(35W max)
PPS: 3.3-6V/5A or 3.3-11V/3A (33W max)
Battery discharge dual port output: Type C1+C2: 40W(30W+5W) / (20W+20W)(max)
 - 4. Supported protocols:
PPS/PD3.0/OC4.0+/3.0/2.0/AFC/SCP/FCP/BC1.2/APPLE2.4
- Power bank capacity: 10000mAh 5000mAh*2 series connection battery pack



WP251D

3 in 1Power Bank Specification

- Input: 35W PD(Min)
- Wireless Output:
Mobile Phone: 15W, 10W, 7.5W, 5W/QI2
Bluetooth: 5W Max/BPP
Smart Watch: 5W Max/MFW
Color: White, Black, OEM



WP252D

3 in 1Power Bank Specification

- Input: 35W PD(Min)
- Wireless Output:
Mobile Phone: 15W, 10W, 7.5W, 5W/QI2
Bluetooth: 5W Max/BPP
Smart Watch: 5W Max/MFW
Color: White, Black, OEM

Customized Case

定制案例

