




深圳市新斯宝科技有限公司
Shenzhen Xinspower Technology Co., Ltd

Bldg 2, XinHao Second Industrial Zone, QiaoTou Community, FuHai St, BaoAn, ShenZhen City, China
Tel: +86 755 23500826 Fax: +86 755 23500926 Inquiry Mail: sales@xinspower.com

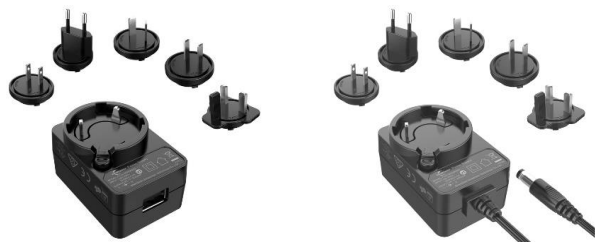

Model:A124-XXXXYYYI, A122-XXXXYYYI Series
12W Series Interchangeable Power Adapter

Application Scenario

- DVR, Sweeping Robot, POS, Speaker, IP Camera, Air Pumps
- Humidifier, Attendance Machine, Portable DVD, TV Antenna
- Networking Item, Aroma Diffuser, LED Strips, Laptops, Mini Fan

Environmental Data

- Operating Temperature: 0~40°C
- Storage Temperature: -10~70°C
- Humidity: 5%~90% Non-Condensing

Standard & Certificates

- IEC 62368 (60950, 60065): CB, CE, UL, RCM, KC, KCC, PSE,
- NOM, BIS, PSB, EAC, BSMI, CCC, RoHS, UKCA etc.
- IEC 61347: CB, CE, GS, CCC, SAA, RCM, KC etc.
- IEC 61558: CB, CE, GS, ETL, PSE, RCM etc.

Efficiency & Enviroment Standard

- Efficiency Level VI
- DOE, CEC, ERP
- RoHS, REACH, CA Prop 65

Main Features

- Universal Input 100~240VAC 47/63Hz
- OVP, OCP, Short-Circuit Protections
- Compact & Stylish Design, MTBF>30,000 Hours

Electrical Data

- Output Voltage: 5~36VDC
- Output Current: 10mA~2500mA
- Ripple & Noise: <120mVp-p

W & D

- Weight: 83g (Removable AC Plugs Excluded)
- External Dimension: 59 x 41.5 x 32mm
- Color Option: White, Black and Customzied

Packaging

- Packed by separate PE bag
- External Carton Box
- Accept the Customer Logo and Made to Order

Typical Model List

Input Voltage	Model No.	O/P Voltage	O/P Current	Ripple & Noise	Load Regulation	Rated Power
100~240V 47~63Hz	A124-0502000I	5V DC	2000mA	<120mVp-p	+/-5%	10 Watt
	A124-0901000I	9V DC	1000mA	<120mVp-p	+/-5%	9 Watt
	A124-1201000I	12V DC	1000mA	<120mVp-p	+/-5%	12 Watt
	A122-2400500I	24V DC	500mA	<120mVp-p	+/-5%	12 Watt
	A122-1900500I	19V DC	500mA	<120mVp-p	+/-5%	9.5 Watt
	A122-2400650I	24V DC	650mA	<120mVp-p	+/-5%	15.6 Watt